

# TEXSONIC TUC-P SERIES



LEADING PLAYER IN INDUSTRIOUS PRECISION CLEANING SYSTEM

# TEXSONIC TUC-P SERIES



The TEXSONIC's TUC-P series ultrasonic cleaner offer more functionality such as LCD display, sensitive touch button & knob control setting which is most convenience technical features to obtains even better result.




Basket



Top Cover

# KEYPAD FEATURES

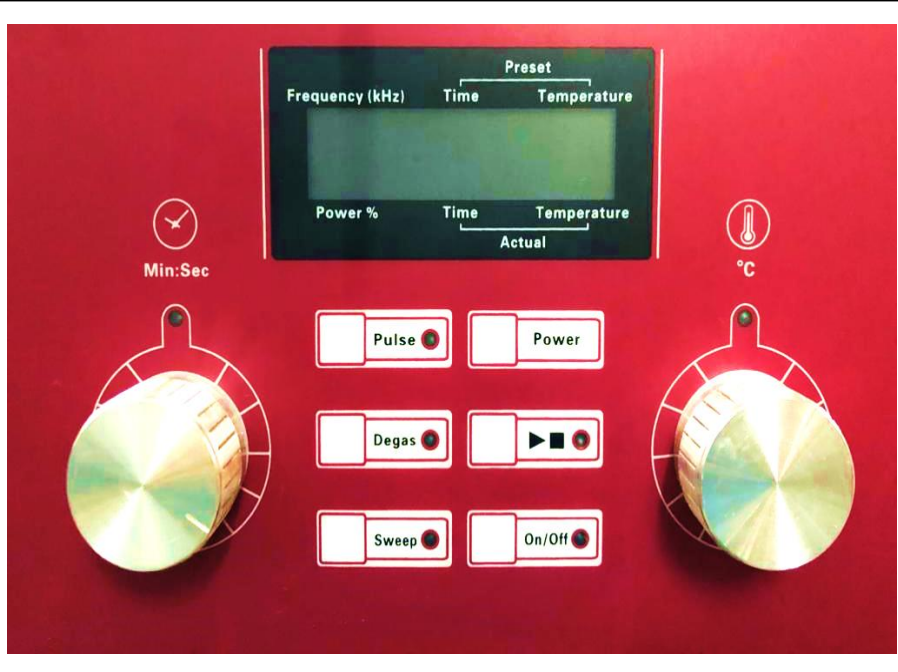

## LCD Display Panel

This LCD screen displaying the cleaner functionality such as ultrasonic frequency, output power selected in 40%-70%-100%, Pre-set & Actual process timer.

## Sensitive Touch Button

The sensitive touch button design to pro-long lifespan due to long-standing usage, button contain with quick degasing mode recommended before cleaning process, sweep mode improve cleaning performance, pulse mode for high strength cleaning power required.

## Dry Run Proof Heater

This cleaner with Integrated special ceramic heater which able to sustain for 12 hours dry run condition without damaging.

# TEXSONIC TUC-P10H SPECIFICATIONS

Model	TEXSONIC TUC-P10H
Capacity	0.7 L
Basket Dimension (MM)	135 x 120 x 85
Internal Tank Dimension (MM)	150 x 135 x 100
Cleaner Outer Dimension (MM)	175 x 160 x 220
Ultrasonic Power (W)	60
Ultrasonic Frequency (kHz)	40 kHz
Heating Power (W)	60
No of Transducer	1 PCS X 60W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P20H SPECIFICATIONS

Model	TEXSONIC TUC-P20H
Capacity	2.0 L
Basket Dimension (MM)	137 x 73 x 50
Internal Tank Dimension (MM)	152 x 88 x 65
Cleaner Outer Dimension (MM)	175 x 110 x 185
Ultrasonic Power (W)	60
Ultrasonic Frequency (kHz)	40 kHz
Heating Power (W)	100
No of Transducer	1 PCS X 60W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P30H SPECIFICATIONS

Model	TEXSONIC TUC-P30H
Capacity	4.0 L
Basket Dimension (MM)	285 x 135 x 85
Internal Tank Dimension (MM)	300 x 150 x 100
Cleaner Outer Dimension (MM)	325 x 175 x 285
Ultrasonic Power (W)	180
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	220
No of Transducer	3 PCS X 60W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P40H SPECIFICATIONS

Model	TEXSONIC TUC-P40H
Capacity	6.0 L
Basket Dimension (MM)	285 x 135 x 135
Internal Tank Dimension (MM)	300 x 150 x 150
Cleaner Outer Dimension (MM)	325 x 175 x 285
Ultrasonic Power (W)	240
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	270
No of Transducer	3 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P50H SPECIFICATIONS

Model	TEXSONIC TUC-P50H
Capacity	10.0 L
Basket Dimension (MM)	285 x 225 x 135
Internal Tank Dimension (MM)	300 x 240 x 150
Cleaner Outer Dimension (MM)	325 x 265 x 330
Ultrasonic Power (W)	320
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	310
No of Transducer	4 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	







# TEXSONIC TUC-P60H SPECIFICATIONS

Model	TEXSONIC TUC-P60H
Capacity	13.0 L
Basket Dimension (MM)	285 x 225 x 185
Internal Tank Dimension (MM)	300 x 240 x 200
Cleaner Outer Dimension (MM)	355 x 325 x 415
Ultrasonic Power (W)	400
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	420
No of Transducer	5 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P70H SPECIFICATIONS

Model	TEXSONIC TUC-P70H
Capacity	20.0 L
Basket Dimension (MM)	310 x 285 x 185
Internal Tank Dimension (MM)	325 x 300 x 200
Cleaner Outer Dimension (MM)	355 x 325 x 330
Ultrasonic Power (W)	480
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	470
No of Transducer	6 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P80H SPECIFICATIONS

Model	TEXSONIC TUC-P80H
Capacity	22.0 L
Basket Dimension (MM)	485 x 285 x 135
Internal Tank Dimension (MM)	500 x 300 x 150
Cleaner Outer Dimension (MM)	525 x 325 x 365
Ultrasonic Power (W)	480
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	470
No of Transducer	6 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

# TEXSONIC TUC-P100H SPECIFICATIONS

Model	TEXSONIC TUC-P80H
Capacity	28.0 L
Basket Dimension (MM)	485 x 285 x 185
Internal Tank Dimension (MM)	500 x 300 x 200
Cleaner Outer Dimension (MM)	525 x 325 x 365
Ultrasonic Power (W)	640
Ultrasonic Frequency (kHz)	37 kHz
Heating Power (W)	620
No of Transducer	8 PCS X 80W
Power Supply	230V / 50 Hz

Drain Tap	
Handles	
Top Cover (Lid)	
Degas	
Sweep	
Pulse	
Power Setting	

## ABOUT US

Sonictron Sdn Bhd actively involved in the development, design, system construction, training, support for Industrial Precision Cleaning Solution.

Sonictron have rich experience in standard, custom- made for all kinds of industrial as specialist in Ultrasonic Cleaning tasks.

Sonictron are well known as solutions provider for even some complicated application. In performance, reliability, and return on investment- we are an organization dedicated to build system in- line with your value. Acting as a solutions provider, all your system are being built with services and support.

Hence, Sonictron invite you to profit from our rich, reliable experience, the specialized manufacturer and supplier of precision cleaning systems.

## CONTACT US

**SONICTRON SDN BHD (648724-V)**

NO.10, JALAN SG RASA 37/KU1, KAW PERINDUSTRIAN SG. RASAU,  
41300 KLANG, SELANGOR D.E. MALAYSIA

TEL: +603 3359 5902    FAX: +603 3359 5912

If you have any enquiry, please do not hesitate to contact us. Our team of friendly consultants are on hand to provide personalized services to our customer

